

# WPG series

Switch guard for switch series WP



## DISTINCTIVE FEATURES

Prevent accidental lever operation  
Latching



## ENVIRONMENTAL SPECIFICATIONS

- Salt spray test: 96 hours (IEC 68-2-11)
- Operating temperature: -40 °C to +85 °C (-40 °F to +185 °F)
- Front panel sealing: IP67 according to IEC 60529



## MATERIALS


- Support plate: black chrome plated brass
- Guard: Stainless steel
- Seal: fluorinated silicone, black



# WPG series

Switch guard for switch series WP

## BUILD YOUR PART NUMBER

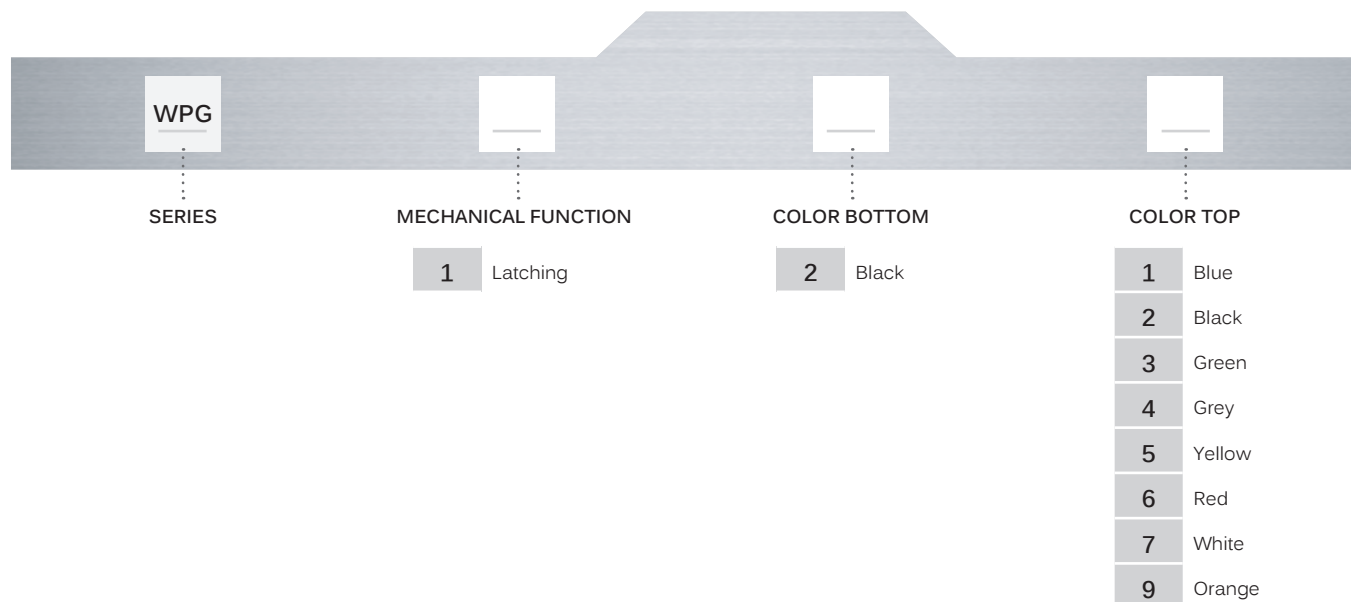

## ABOUT THIS SERIES



Mounting accessories: one seal supplied, thickness of the seal: 1.1 mm (-0/+0.1 mm)

# WPG series

Switch guard for switch series WP

## DIMENSIONS

