

9400-9600 series

Momentary pushbutton switches



DISTINCTIVE FEATURES

Two case lengths

Three electrical functions

Sealing options

Model X1146 with Ø 16 (.630) bushing



ELECTRICAL SPECIFICATIONS

- Max. current/voltage rating with resistive load :
 - silver contact (A) : 1 A 30 VDC
 - gold plated contacts (CD) : 100 mA 30 VDC
- Initial contact resistance : 50 mΩ max.
- Insulation resistance : 1,000 MΩ min. at 500 VDC
- Dielectric strength :
 - 1,000 Vrms 50 Hz min. between terminals
 - 1,500 Vrms 50 Hz min. between terminals and frame
- Electrical life : 250,000 cycles



GENERAL SPECIFICATIONS

- Total travel :

9600-9400-9400Y		9600N-9400N
Functions 3 and 5	Function 2	Function 3
1.3 mm	2 mm	0.9 mm

- Torque : 1.25 Nm (.922 Ft.lb) max. applied to nut
- Operating temperature : -30 °C to +65 °C (-22 °F to +149 °F)



MATERIALS

- Case : thermoplastic UL94-V0
- Actuator : polyamide, glass filled
- Bushing : brass, nickel plated
- Contacts :
 - A : silver
 - CD : brass, gold plated
- Terminal seal : epoxy

APEM products may be recycled at end-of-life for the re-claiming of valuable metal components.

The company reserves the right to change specifications without notice.




9400-9600 series


Momentary pushbutton switches




PANEL CUT-OUT




TERMINALS



9600Z1




9600




9400



ELECTRICAL FUNCTIONS



Function 2 (NC)



Function 3 (NO)





Function 5 (combined)

9400-9600 series

Momentary pushbutton switches



BUILD YOUR PART NUMBER

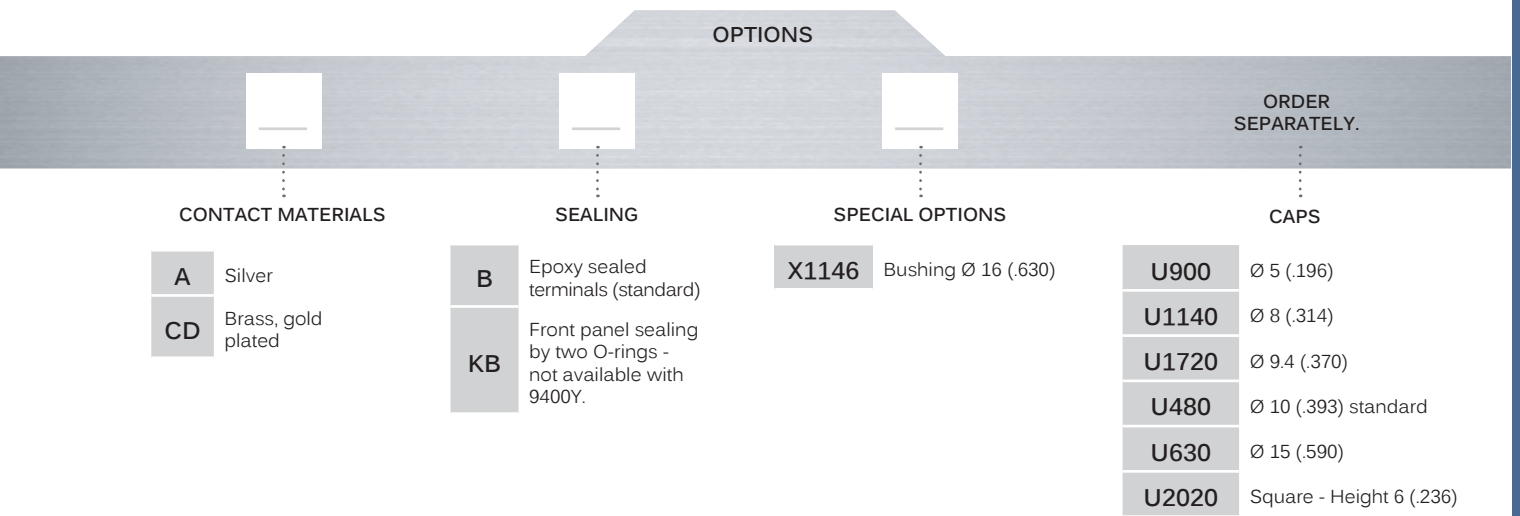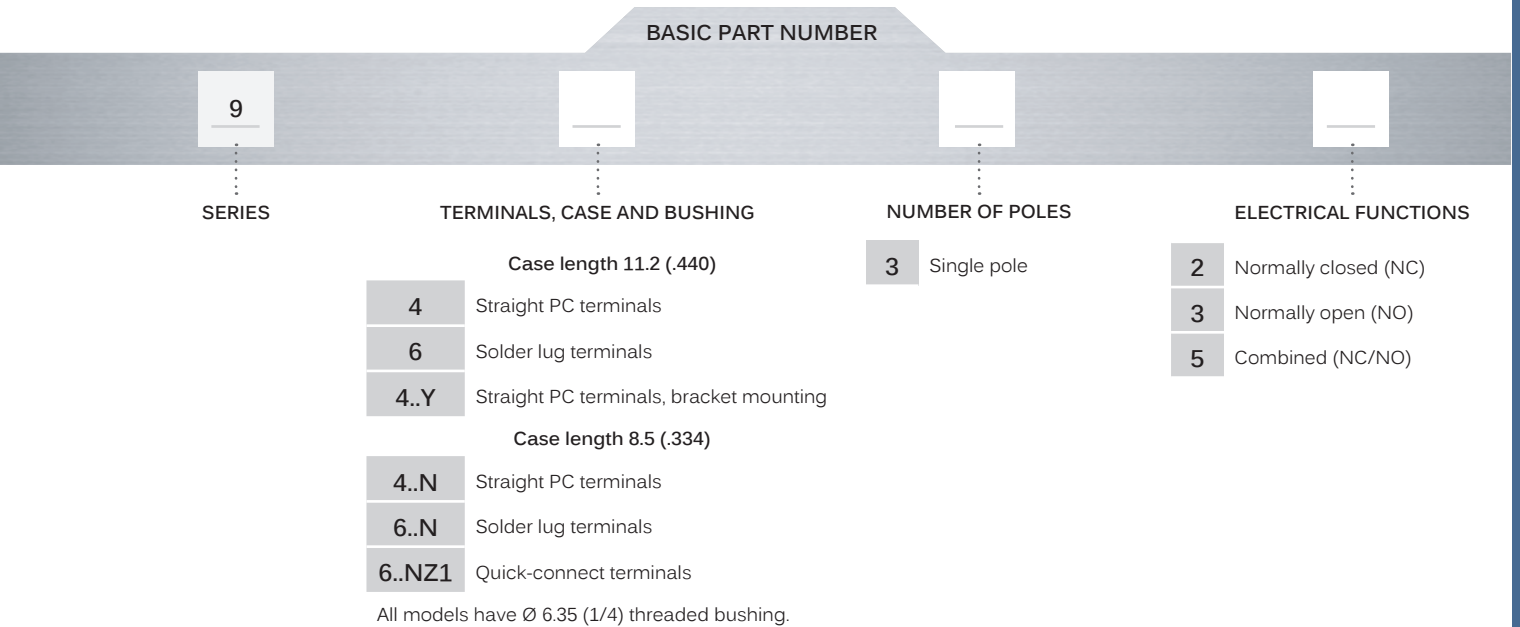

ABOUT THIS SERIES

On the following pages, you will find successively basic part numbers of switches and options in the same order as in above chart.

- Notice** : please note that not all combinations of above numbers are available. Refer to the following pages for further information.
- Sealing boots** are available to protect the switches against dust and water. See "Sealing Boots" section of website.
- Mounting accessories** : standard hardware supplied with all models : 2 hex nuts 8 mm (.314) across flats and 1 lockwasher. Standard and special hardware available is presented in the "Hardware" section of website.

9400-9600 series


Momentary pushbutton switches

SOLDER LUG TERMINALS CASE LENGTH 11.2 (.440) : 9600



9632 B  Normally Closed


9635 B  Combined function

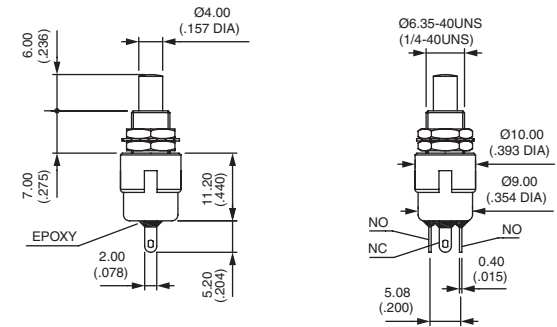


STRAIGHT PC TERMINALS CASE LENGTH 11.2 (.440) : 9400



9432 B  Normally Closed

9433 B  Normally Open


9435 B  Combined function

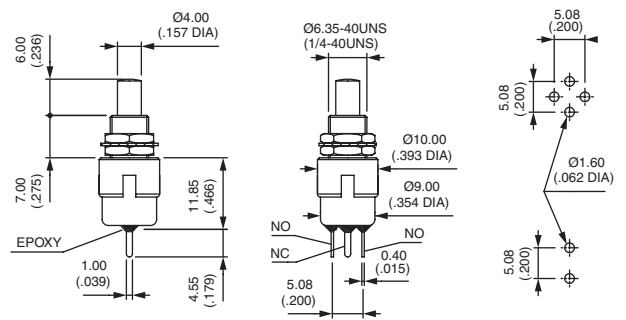


BRACKET MOUNTING CASE LENGTH 11.2 (.440) : 9400Y



9432Y B  Normally Closed

9433Y B  Normally Open


9435Y B  Combined function

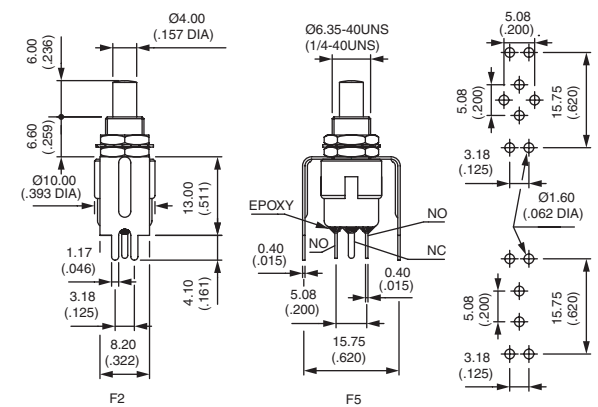


The bracket is not fastened to the switch.

SOLDER LUG TERMINALS CASE LENGTH 8.5 (.334) : 9600N



9633N B  Normally Open

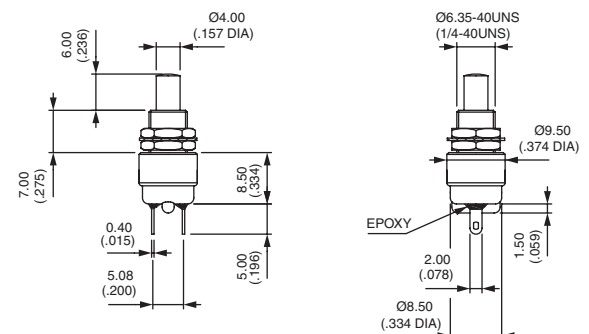

Also available with quick-connect terminals 2.8 x 0.5 mm : 9633NZ1

9400-9600 series

Momentary pushbutton switches


STRAIGHT PC TERMINALS CASE LENGTH 8.5 (.334) : 9400N




9433N B  Normally Open



BUSHING Ø 16 (.630) METAL PLUNGER : 9633•X1146



Silver contact
9633ABX1146  Normally Open

Gold plated silver contacts
9633ADBX1146  Normally Open

Panel cut-out : Ø 16.2 (.637)
Max. current/voltage rating. : 1 A 30 VDC
Epoxy sealed terminals. Options of the following pages not applicable.

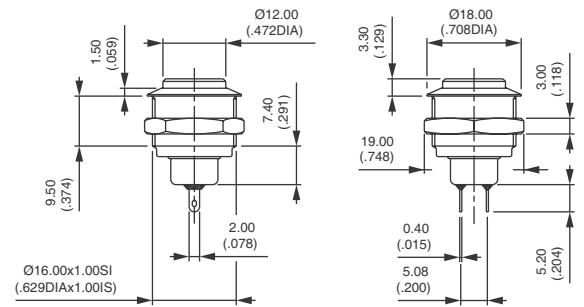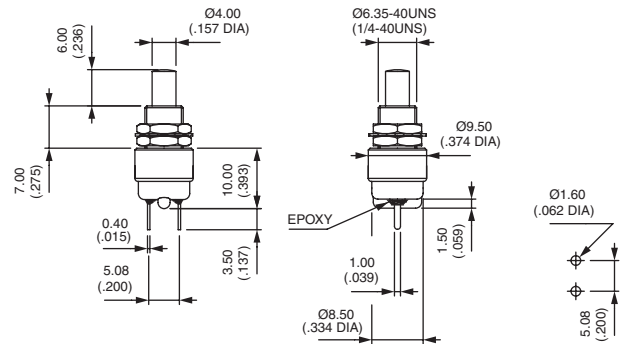


Hex nut 19 (.748) across flats

CONTACTS MATERIALS




- A Silver
- CD Brass, gold plated

SEALING



- B Epoxy sealed terminals (standard)
- KB Combined sealings
Epoxy sealed terminals + front panel sealing by two O-rings. Protects the switch against water and dust. Panel seal withstands 0.1 bar pressure. Option KB not available on 9400Y model.

Sealing boots : see "Sealing boots" section of website.

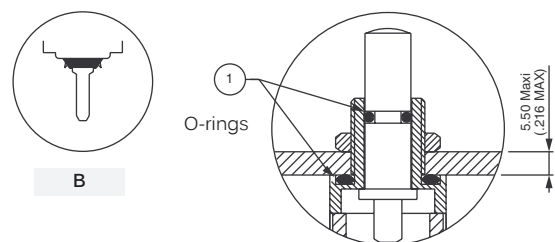

KB

9400-9600 series

Momentary pushbutton switches

SPECIAL OPTIONS




X1146 Model with dia. 16 (.630) bushing and metal plunger
See previous page.

CAPS

Order separately.

For cap colors, replace last "0" by number :

- 1 Blue
- 1/4 Dark blue
- 2 Black
- 3 Green
- 4 Grey
- 5 Yellow
- 6 Red
- 7 Ivory
- 7/1 White
- 9 Orange

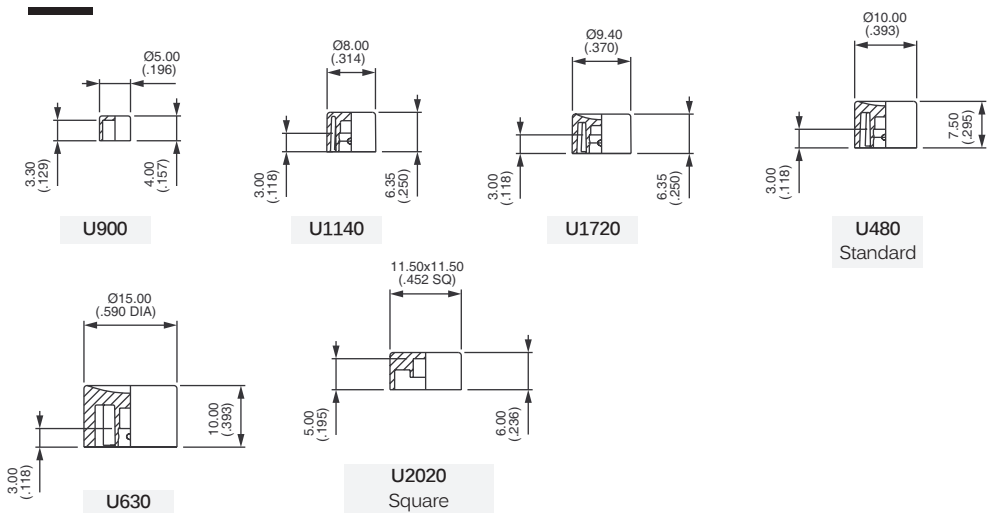

DRESS NUTS

Order separately. Chrome plated.

